



BPL Medical
Technologies



Experience the
Compactness

ECG HOLTER

TRAC NEO T1




Happier Living Everyday

www.bplmedicaltechnologies.com





Enhanced ECG diagnosis made possible with superior trace quality

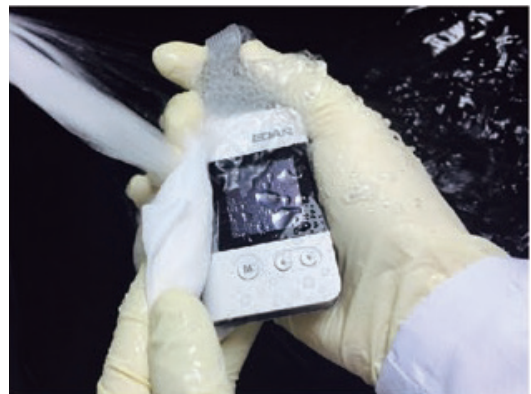

Protection against Water/Dust

IP27 Level of Protection against Degree of protection against solid foreign objects and harmful Ingress of water



OLED Screen

Real time waveform display provided on OLED Screen (128 X 128)



Compact & Lightweight

Size :76mmx49mmx16 mm,±2mm
Weight: 50g±5g (excluding battery)



Lower Power Consumption

Powered by 1 AAA IEC LR03(1.5v) alkaline battery
24 hours (with sample rate 1024Hz)
144 hours (with sample rate 128Hz)



Pacemaker Detection

Unique multi-channel pacemaker detect circuit effectively prevents wrong detection of pacemaker signal caused by artifacts



10 Electrodes 12 Leads

10-electrode standard lead wires are utilized by the recorder (12-channel) to create a 12-lead ECG signal



Removable micro SD Card

1GB card records upto 24 hours of the 12-lead ECG at 1024 Samples/Sec








Two optional modes of ECG Data Transfer

Through USB cable connected to PC or MicroSD card Reader



Advanced Features

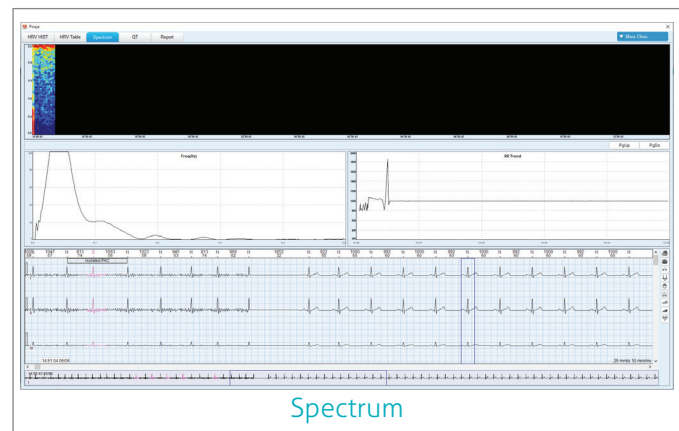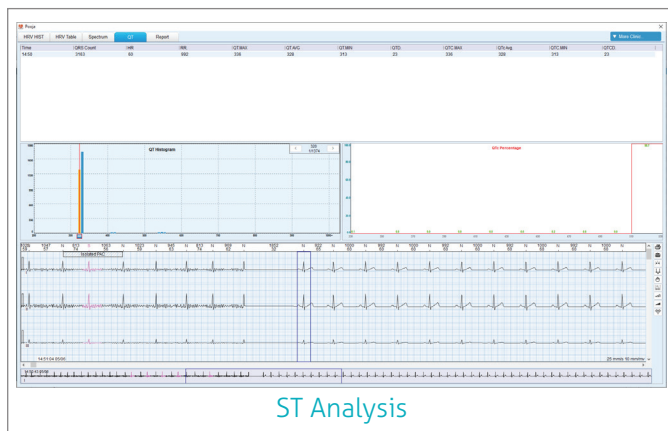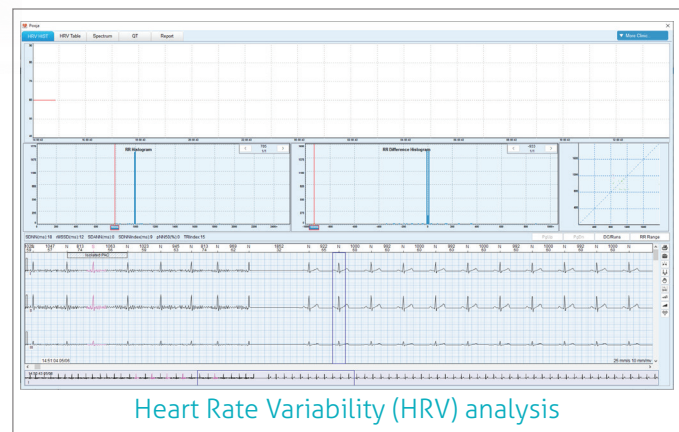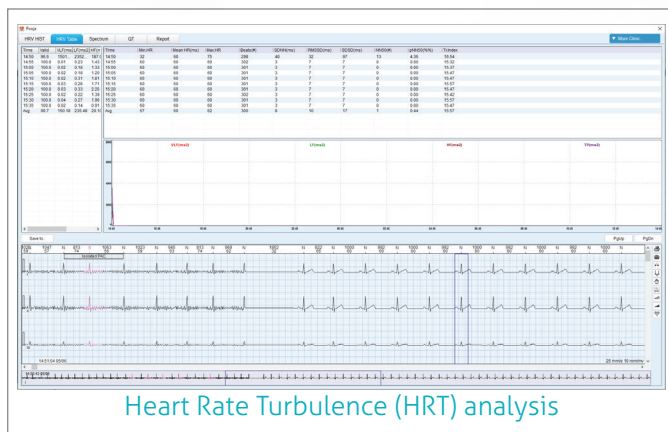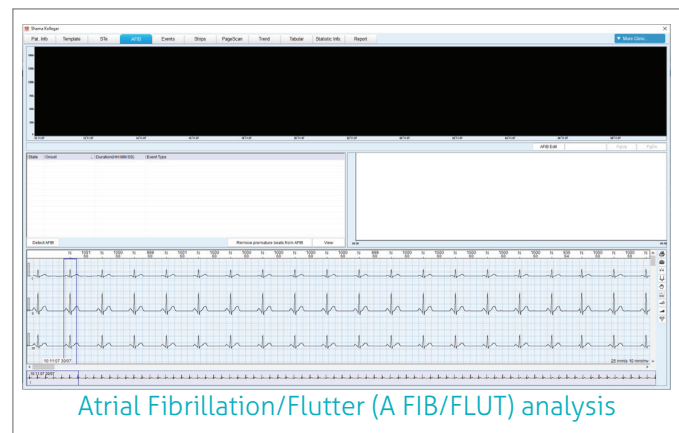

Holter Software

Data Transfer

- Full disclosure of 24/48/96 hours and 6 days ECG data
- Download data via micro SD card or USB cable

Easy Workflow

- User defined workflow
- Template categorized with color codes
- Morphology Classification
- Group modification and fast editing
- Comprehensive histogram
- ST segment analysis
- User-defined report contents & format

Advanced Analysis

- Advanced Analysis
- Atrial Fibrillation/Flutter (A FIB/FLUT) analysis
- Heart Rate Turbulence (HRT) analysis
- Heart Rate Variability (HRV) analysis
- ST Analysis
- Spectrum

Product Specifications

Performance Specifications	
Channels	12 channels
Recording	Full disclosure, no data compression
Frequency Response	0.05Hz to 60Hz (-3dB)
Input impedance	$\geq 20M\Omega$
Gain	5mm/mV, 10mm/mV, 20mm/mV, $\pm 5\%$
CMRR	$\geq 100dB$
Sample Rate	128, 256, 512 or 1024 samples/second
Minimum Amplitude	50 μV_{p-p}
A/D	8/12/14/16/18 bits
Resolution	2.52uV/LSB
Pacemaker Detection	$\pm 2mV \sim \pm 200mV$, 0.1ms \sim 2.0ms
ECG Signal Verification	LCD at hook-up or on demand
Data Transmission	Through USB cable or MicroSD card reader
Input Circuit Current	$\leq 0.1\mu A$
Time Constant	$\geq 3.2s$ (0, +20%)
Noise	$\leq 50\mu V_{pp}$
DC Offset Voltage	$\pm 300mV$

Safety Specifications	
Anti-electric-shock type	Internal power supply
Anti-electric-shock degree	Type CF
Degree of protection against solid foreign objects and harmful ingress of water	IP27
Degree of safety of application in the presence of flammable gas	Equipment not suitable for use in the presence of flammable gas
Working mode	Continuous operation

Physical Specifications	
Dimensions	76mm \times 49mm \times 16 mm, $\pm 2mm$
Weight	50 g, $\pm 5g$ (excluding battery)

Battery Specifications	
Battery type	1 AAA IEC LR03(1.5v) alkaline battery
Battery life	24 hours (with sample rate 1024Hz) 144 hours (with sample rate 128Hz)

Environment Specifications		
Parameter	Transport & Storage	Working
Temperature	-20°C (-4°F) \sim +55°C(+131°F)	+5°C (+41°F) \sim +45°C(+113°F)
Relative Humidity	10%~95% Non-Condensing	10%~95% Non-Condensing
Atmospheric Pressure	70kPa \sim 106kPa	70kPa~106kPa

*Technical specifications are subject to change

CERTIFIED ISO 13485 : 2016 COMPANY

BPL Medical Technologies Private Limited

Regd. Office: 11th KM, Bannerghatta Road,
Arakere, Bangalore - 560076, India.

Toll Free: 1800-4252355

Website: www.bplmedicaltechnologies.com

For Enquiries: sales.medical@bpl.in

CIN: U33110KA2012PTC067282

Follow us on

